


Features

- Extruded aluminium frame
- Powder coated finish
- Back lit with 0.9M Flex&Plug
- UGR<22




Applications

Offices, Conference rooms
Schools, Retail

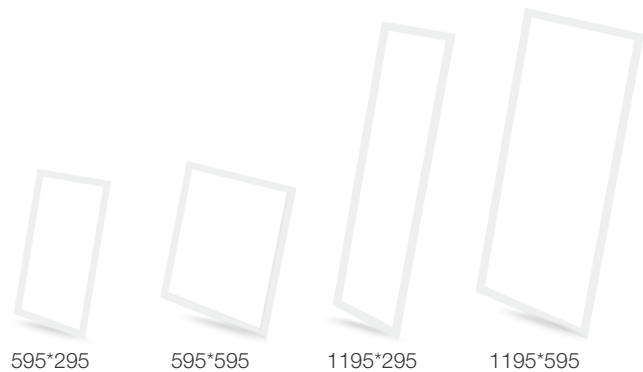

Warranty

3 years

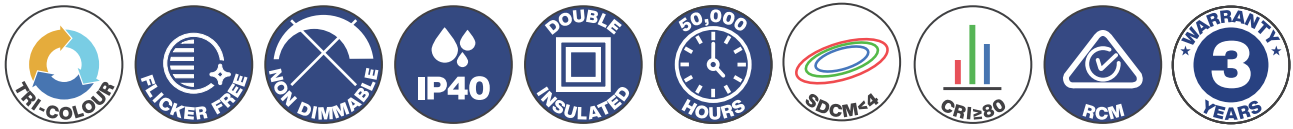

Product Data

Order Code	Wattage	CCT	Lumen Output	Beam Angle	Inrush Current	Inrush Time	Size (LxWxH)mm	Weight (kg)
221019	17W	4K / 5K / 6.5K	1600/1700/1600Lm	110°	27A	100uS	595*295*33	0.95
221020	32W	4K / 5K / 6.5K	3200/3400/3200Lm	110°	44.8A	117.7uS	595*595*33	1.52
221021	32W	4K / 5K / 6.5K	3200/3400/3200Lm	110°	44.8A	117.7uS	1195*295*33	1.60
221022	50W	4K / 5K / 6.5K	5000/5100/5000Lm	110°	17A	300uS	1195*595*33	3.32

[1] Operating temperature: -20°C~+40°C

[2] Voltage: 220-240V

[3] PF: 0.9