


# DESTINY PLUS PRO

## LOW UGR PANEL

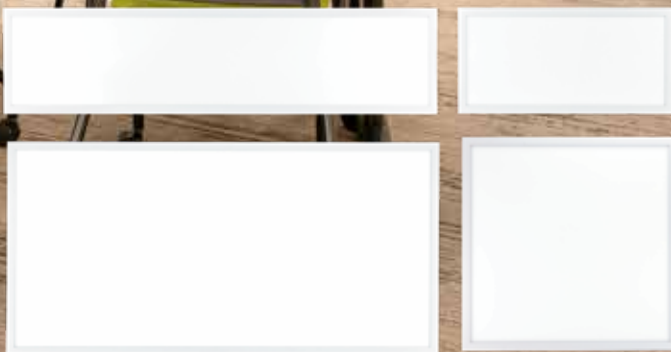

Destiny Plus Pro is a premium range comparing to our Destiny Plus Low Glare range panels. The new range has kept the original edge-lit panel design, same micro-prismatic diffuser pattern and PMMA light guide panel.

This range has a higher efficacy up to 125Lm/W and comes with a flicker free driver to produce a remarkable amount of light with comfortable visual solution while using less energy.

With the exception of 1200x600mm, all other three sizes panels of Destiny Plus Pro will have a multi-wattage driver to provide more wattage selection.


The whole range will be perfect for a variety of applications, from commercial and industrial spaces to retail areas. It's sleek and modern design seamlessly blends into any environment, providing a sophisticated and professional look.

### Features

- Super slim design, max 15mm in height
- Micro-Prismatic diffuser
- PMMA LGP
- Up to 126Lm/W
- Multi-Watt except for 1195x595 panel
- UGR<19
- Flicker Free




### Applications

Offices, Conference rooms  
Schools, Retail

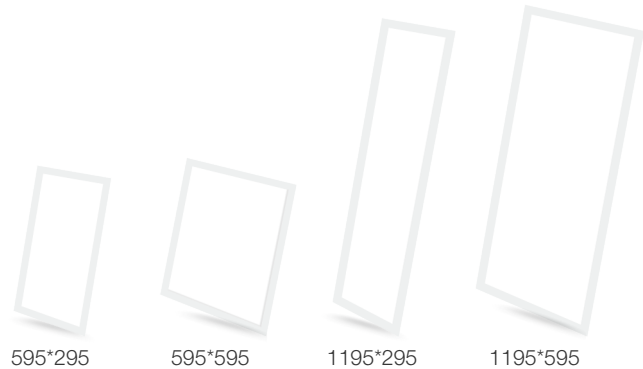

### Warranty

5 years

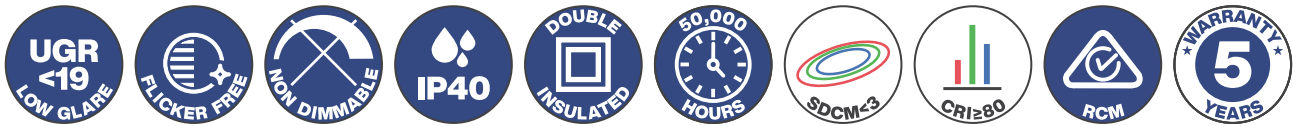

### Product Data

Order Code	Wattage	CCT	Lumen Output	Beam Angle	Inrush Curren	Inrush Time	Size (LxWxH)mm	Weight (kg)
223334H <sup>[4]</sup>	20*/17/13/11W	4000K	2350*/2000/1500/1350Lm	90°	27A	100uS	595*295*13	1.20
223344H <sup>[4]</sup>	35*/31/27/23W	4000K	4300*/3850/3400/2900Lm	90°	18.7A	300uS	595*595*13	2.00
223354H <sup>[4]</sup>	35*/31/27/23W	4000K	4300*/3850/3400/2900Lm	90°	18.7A	300uS	1195*295*13	2.10
223364H	42W	4000K	5000Lm	90°	10A	460uS	1195*595*15	4.30

[1] Operating temperature: -20°C~+40°C

[2] Voltage: 220-240V

[3] PF: 0.9

[4] \*Preset Wattage and Lumen Output

Specifications are for reference only and may be changed without prior notice.