


DESTINY PLUS V

EDGE LIT LED
PANEL

Destiny Plus V is an upgrade to our current Destiny Plus Tri-colour panels. Instead of original three colour temperature selections, we are now launching the whole range with five-colour selections.

We have also upgraded the driver to flicker free in order to generate a more comfortable light output.

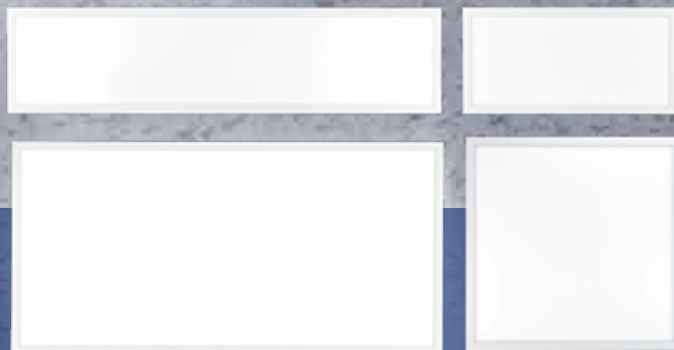


The whole range will keep the original edge-lit design with 15mm thickness which is able to fit into all kinds of ceilings and PMMA light guide to ensure a long lifespan, reducing the need for frequent maintenance and replacement.

Features

- Five selectable colour temperatures
- Screwless design
- Extruded aluminium frame
- Powder coated finish
- Edge lit
- Flicker Free



Applications

Offices, Conference rooms
Schools, Retail

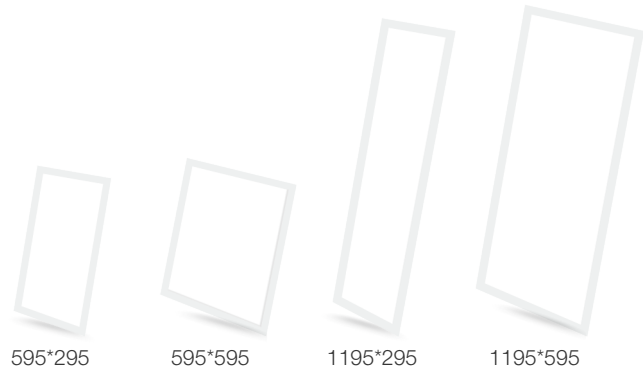

Warranty

5 years

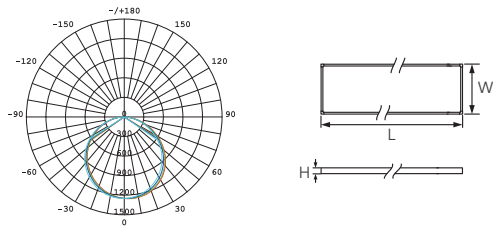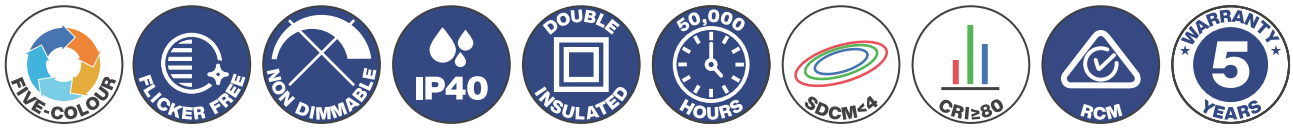

Product Data

Order Code	Wattage	CCT	Lumen Output	Beam Angle	Inrush Curren	Inrush Time	Size (LxWxH)mm	Weight (kg)
221000	17W	3000/4000/5000/5700/6500K	1400/1600/1600/1600/1500Lm	120°	27A	100uS	595*295*15	1.17
221001	32W	3000/4000/5000/5700/6500K	2950/3400/3400/3400/3200Lm	120°	18.7A	300uS	595*595*15	1.95
221002	32W	3000/4000/5000/5700/6500K	2950/3400/3400/3400/3200Lm	120°	18.7A	300uS	1195*295*15	2.05
221003	50W	3000/4000/5000/5700/6500K	4500/5000/5000/5000/4800Lm	120°	10A	460uS	1195*595*15	4.31

[1] Operating temperature: -20°C~+40°C

[2] Voltage: 220-240V

[3] PF: 0.9

[4] SDCM<4 only for 3000K & 6500K



Specifications are for reference only and may be changed without prior notice.