


Features

- Super slim design, max 15mm in height
- Micro-Prismatic diffuser
- PMMA LGP
- Up to 126Lm/W
- Multi-Watt except for 1195x595 panel
- UGR<19
- Flicker Free




Applications

Offices, Conference rooms
Schools, Retail

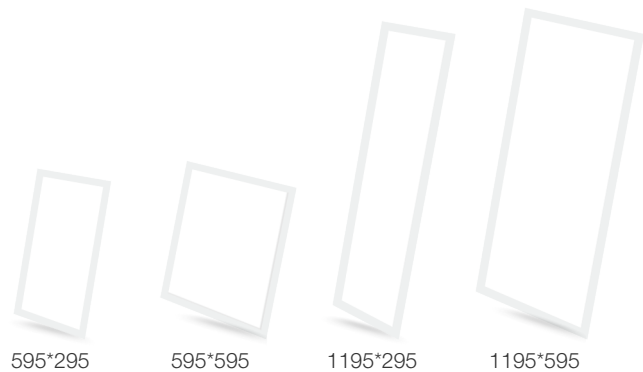

Warranty

5 years

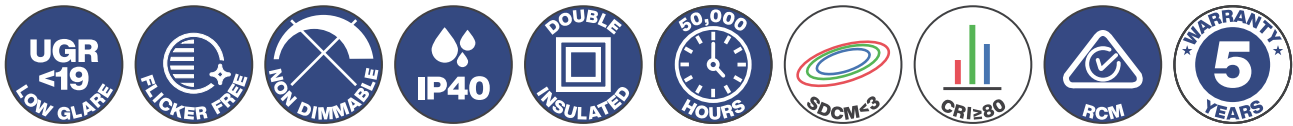

Product Data

Order Code	Wattage	CCT	Lumen Output	Beam Angle	Inrush Curren	Inrush Time	Size (LxWxH)mm	Weight (kg)
223334H ^[4]	20*/17/13/11W	4000K	2350*/2000/1500/1350Lm	90°	27A	100uS	595*295*13	1.20
223344H ^[4]	35*/31/27/23W	4000K	4300*/3850/3400/2900Lm	90°	18.7A	300uS	595*595*13	2.00
223354H ^[4]	35*/31/27/23W	4000K	4300*/3850/3400/2900Lm	90°	18.7A	300uS	1195*295*13	2.10
223364H	42W	4000K	5000Lm	90°	10A	460uS	1195*595*15	4.30

[1] Operating temperature: -20°C~+40°C

[2] Voltage: 220-240V

[3] PF: 0.9

[4] *Preset Wattage and Lumen Output

Specifications are for reference only and may be changed without prior notice.