

Features


- Multi-Watt
- High lumen efficacy @150Lm/W
- 0-10V dimmable
- Die-cast aluminium construction

Applications

Commercial, Industrial, Facilities,
Warehouses, Centres, Airport Hangers

Warranty

5 years

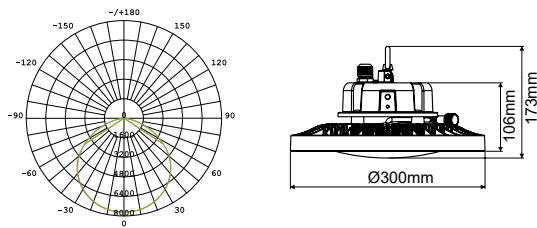

Product Data

Order Code	Wattage	CCT	Lumen Output	Beam Angle	Weight (kg)
333324	150 / 125 / 100 / 90 / 70W	4000K	22,500 - 10,500Lm*	110°	3.57
333325	150 / 125 / 100 / 90 / 70W	5000K	22,500 - 10,500Lm*	110°	3.57
333545	200 / 150 / 135 / 120 / 95W	5000K	30,000 - 14,000Lm**	110°	3.57

[1] Operating temperature: -30°C~+50°C

[2] Voltage: 220-240V

[3] PF: 0.9

[4] *22,500 / 18,900 / 15,000 / 13,500 / 10,500Lm

[5] **30,000 / 22,500 / 20,000 / 18,000 / 14,000Lm

Optional Accessories

Item	Order Code
Plug-&-Play MW Sensor	333409
Remote Control	213979
70° Aluminium Reflector	333259
90° Aluminium Reflector	333199
70° PC Diffuser	333319
70° PC Diffuser Cover	332038
Surface Mounting Bracket	333379
Pole Mounting Bracket	333369
0-10V Dimming Cable	333389

Specifications are for reference only and may be changed without prior notice.

