



ArmourLed

IK10 Vandal Proof IP66 Batten

Introducing the ArmourLed Batten, with its cutting-edge features and robust design. Harnessing multi-watt versatility, ArmourLed Batten offers three power options: 20W, 14W, and 10W, ensuring adaptability tailored to your needs. Achieving remarkable efficiency of up to 135Lm/W, this batten delivers powerful illumination while conserving energy, and five colour selection ranging from 3000K to 6500K.

Crafted with a high impact polycarbonate body and diffuser rated to IK10, ArmourLed Batten is built to withstand the toughest conditions, boasting an impressive IP66 rating for weather resistance.

The multiple cable entry points and knockout provisions, along with a user-friendly large 6mm terminal block for easy installation. The quick-to-fit single piece light module streamlines setup, while stainless steel allen key screws ensure vandal-proof protection for added peace of mind.

Backed by a 5-year warranty, ArmourLed Batten offers reliability and longevity. For added versatility, choose the sensor version featuring an onboard remote programmable microwave sensor with dimming and daylight harvesting functions, providing additional convenience and efficiency.



Features

- Multi-Watt 20/14/10W
- High efficiency up to 135Lm/W
- Five colour selectable 3K/4K/5K/5.7K/6.5K
- High impact polycarbonate body and diffuser rated to IK10
- Designed to withstand the harshest weather conditions, boasting an impressive IP66 rating
- Multiple cable entry points and knockout provisions for easy installation and a user-friendly large 6mm terminal block
- Quick-to-fit single piece light module
- Stainless steel allen key screws ensuring vandal proof protection
- 5-year warranty
- Dimming Options: DALI Options



Applications

- Commercial, Car parks, Walkways, Schools, Public amenities

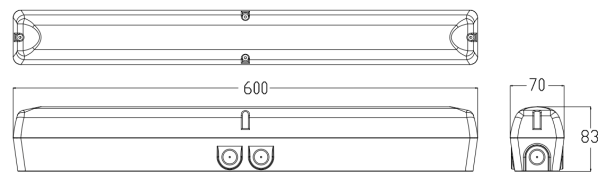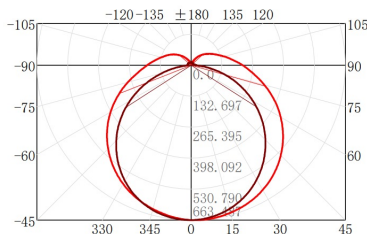

Product Data

Order Code	Wattage	CCT	Lumen Output	Size (L x W x H)
211054	20/14/10W	3000/4000/5000/5700/6500K	Up to 135Lm/W / 2700Lm	600*70*83mm
211054DS	20/14/10W	3000/4000/5000/5700/6500K	Up to 135Lm/W / 2700Lm	600*70*83mm

[1] Voltage: 220~240V
 [2] Operating Frequency: 50/60Hz
 [3] Operating Temperature: -25°C to +45°C
 [4] DS – Suffix: Onboard remote programmable microwave sensor with dimming and daylight harvesting functions