


SUMMARY

The Destiny Plus low UGR is a highly efficient low glare edge-lit panel. Engineered using a PMMA light guide to deliver a lighter, brighter and stronger result. It's also incredibly slim at only 13mm thin. It features a pre-wired flex and plug for quick and easy installation. It also features CRI rating of Ra>80 and a MacAdams rating of SDCM<3. Built to last, it has an aluminium frame that is finished in smooth powder-coating for durability and a micro-prism diffuser.

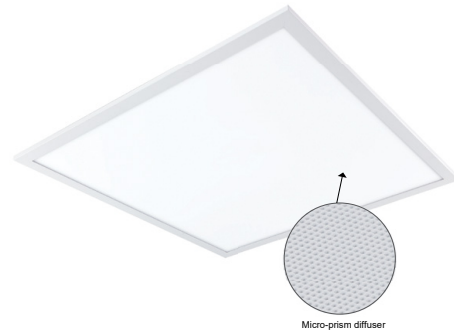

<p>A circular light distribution diagram with a grid of lines. The outer ring shows beam angles from 0 to 180 degrees. The inner rings show UGR values: 150, 120, 90, 60, 30, and 0. A blue shaded area indicates the beam spread, and a red line indicates the UGR curve.</p>	<p>Technical drawing of the panel showing a square face with dimensions 595mm by 595mm and a thickness of 13mm. The drawing includes break lines to indicate the panel's size.</p>	<p>A standard black and white QR code.</p>	<ul style="list-style-type: none"> VEET Approved IPART Approved
--	--	--	---

PRODUCT DATA

Order Code	223344
Voltage	220-240V
Wattage	32W
Lumen Output	3400Lm
CCT	4000K
IP Rating	IP40
UGR Rating	UGR<19
MacAdams Rating	SDCM≤3
CRI Rating	Ra≥80
Beam Angle	90°
Light Source	SMD Chips
Driver	Remote
Dimmable	No
Connection	1.2 flex and plug
Construction	Extruded aluminium frame / Micro-prism diffuser
Finish	Powder coated
Fitting Colour	White
PF	0.9
Net Weight (kg)	1.95
Lifetime L80B50	50,000 hours
Warranty	5 years

