

Features



- Special frame design for air handling
- Multi-Watt, up to 137Lm/W
- Low-glare micro prismatic structure UGR<19
- PMMA light guide
- 1.0m flex & plug
- DALI or 0-10V dimming options

Applications

Commercial, Industrial, Offices

Warranty

5 years

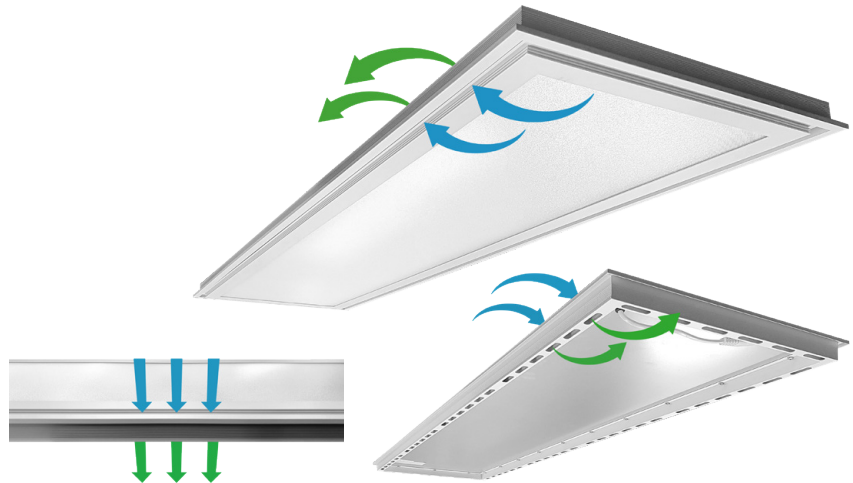

Product Data

ORDER CODE	CCT	WATTAGE	LUMEN	BEAM ANGLE	SIZE (mm)	NET WEIGHT
223864	4000K	10W/12W/15W/20W	1300Lm/1560Lm/1850Lm/2550Lm	90°	595 x 295 x 25	1.82 kg
223854	4000K	24W/30W/34W/38W	3200Lm/4000Lm/4550Lm/5100Lm	90°	1195 x 295 x 25	3.22 kg
223894	4000K	24W/30W/34W/38W	3200Lm/4000Lm/4600Lm/5100Lm	90°	1195 x 395 x 25	4.18 kg
223874	4000K	24W/30W/34W/38W	3200Lm/4000Lm/4600Lm/5100Lm	90°	595 x 595 x 25	3.20 kg
223884	4000K	24W/30W/34W/38W	3250Lm/4000Lm/4600Lm/5200Lm	90°	1195 x 595 x 25	6.25 kg

[1] Operating temperature: -20°C~+40°C

[2] Voltage: 220-240V

[3] PF: 0.9

[4] Efficacy can be slightly different at different wattage level

[5] Inrush Current: 22A @ 150µS

