


Marklite

Low Glare Downlight

SUMMARY

The Marklite is a deep set, low glare downlight solution for residential and commercial applications. It features an integrated Flicker-Free driver for superior lighting comfort and Tri-Colour selectable technology offering the flexibility and convenience of 3 colour temperatures in 1 fitting. Installers can now cater to a broader range of needs with fewer variants, saving time and money. Rated IP54 and IC-4 for peace of mind, it can be safely installed in wet areas like bathrooms and abutted against thermal building materials like insulation.



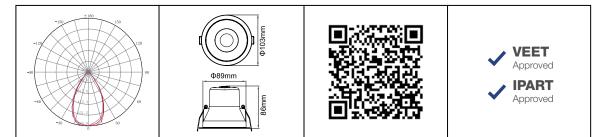

PRODUCT DATA

| Order Code | 171014BK |
|----------------------|--|
| Voltage | 220-240V |
| Wattage | 9W |
| Lumen Output 3K | 700Lm |
| Lumen Output 4K & 5K | 750Lm |
| ССТ | Tri-Colour Selectable - 3K / 4K / 5K |
| IP Rating | IP44 |
| IC Rating | IC-4 |
| Beam Angle | 60° |
| Light Source | SMD Chips |
| Driver | Integrated Flicker-Free |
| Dimmable | Yes. Leading or Trailing Edge, Universal |
| | (Refer to Dimmer Compatibility List) |
| Connection | 1.2 flex & plug |
| Fitting Type | Deep set |
| Cutout Size | Ø90mm |
| Construction | Polycarbonate body / opal polycarbonate diffuser |
| Fitting Colour | Black |
| PF | 0.9 |
| Net Weight (kg) | 0.24 |
| Lifetime L70B50 | 35,000 hours |
| Warranty | 5 years |
| | |

