

Features


- Die-cast aluminium
- Tempered glass cover
- High efficacy up to 160Lm/W
- DALI & 1-10V dimming options

Applications

Industrial, Warehouses,
Car Parks, Large Areas

Warranty

5 years

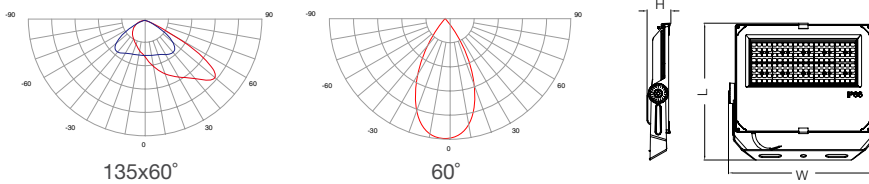

Product Data

| Order Code | Asym/Sym | Wattage | CCT | Lumen Output | Beam Angle | Size (ØxH)mm | Weight (kg) |
|------------|------------|---------|-------|--------------|------------|--------------|-------------|
| 273395 | Asymmetric | 150W | 5000K | 24000Lm | 135*60°* | 407x361x57 | 4.5 |
| 273394 | Asymmetric | 150W | 4000K | 24000Lm | 135*60°* | 407x361x57 | 4.5 |

- [1] Operating temperature: -30°C~+45°C
 [2] Voltage: 220-240V
 [3] PF: 0.9
 [4] *: Asymmetric options: 110°20°/110°40°
 [5] Inrush Current: 100A@200µs
 [6] Leakage Current>=0.75mA

