

Features


- Die-cast aluminium
- Tempered glass cover
- High efficacy up to 160Lm/W
- DALI & 1-10V dimming options

Applications

Industrial, Warehouses,
Car Parks, Large Areas

Warranty

5 years

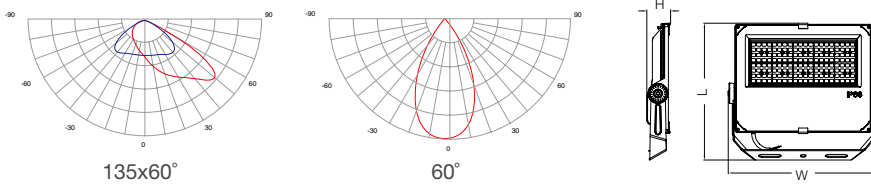

Product Data

| Order Code | Asym/Sym | Wattage | CCT | Lumen Output | Beam Angle | Size (ØxH)mm | Weight (kg) |
|------------|------------|---------|-------|--------------|------------|--------------|-------------|
| 273455 | Asymmetric | 400W | 5000K | 64000Lm | 135*60* | 542x421x71 | 10.3 |
| 273454 | Asymmetric | 400W | 4000K | 64000Lm | 135*60* | 542x421x71 | 10.3 |

[1] Operating temperature: -30°C~+45°C

[2] Voltage: 220-240V

[3] PF: 0.9

[4] *: Asymmetric options: 110*20°/110*40°

[5] Inrush Current: 200A@200µs

[6] Leakage Current>=0.75mA

