

## Features


- Die-cast aluminium
- Tempered glass cover
- High efficacy up to 160Lm/W
- DALI & 1-10V dimming options

## Applications

Industrial, Warehouses,  
Car Parks, Large Areas

## Warranty

5 years

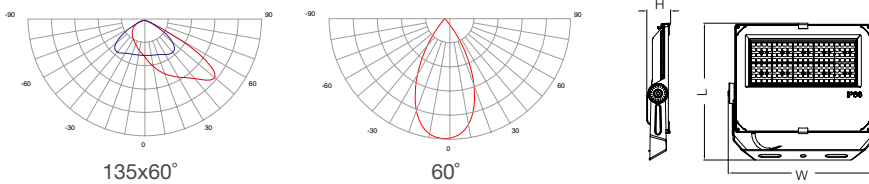

## Product Data

Order Code	Asym/Sym	Wattage	CCT	Lumen Output	Beam Angle	Size (ØxH)mm	Weight (kg)
273495	Asymmetric	600W	5000K	96000Lm	135*60*	657x521x83	15.7
273494	Asymmetric	600W	4000K	96000Lm	135*60*	657x521x83	15.7

- [1] Operating temperature: -30°C~+45°C  
 [2] Voltage: 220-240V  
 [3] PF: 0.9  
 [4] \*: Asymmetric options: 110\*20°/110\*40°  
 [5] Inrush Current: 240A@200µs  
 [6] Leakage Current>=0.75mA

