

A photograph of a park at dusk or dawn, with several tall, black, post-top streetlights illuminating the path. The trees are lush and green, and the sky is a soft, hazy blue. In the foreground, a close-up of the top of one of the streetlights is shown, glowing with a warm, yellow light. The light fixture has a distinctive, wide, flared top and a narrow, vertical stem.

Milano Post Top

Tri-Colour Multi-Watt

Introducing the Milano Post Top: Outdoor Illumination

Elevate your commercial outdoor space with the Milano Post Top Light. This versatile luminaire is your gateway to crafting an inviting atmosphere that seamlessly merges safety with aesthetic excellence.

Outdoor illumination goes beyond functionality; it infuses vitality into your surroundings, ensuring that your commercial establishment is not only secure but also comfortable and undeniably appealing. With the Milano Post Top, any outdoor area becomes an inviting and multifunctional space that beckons exploration.

Engineered with precision using top-tier die-cast aluminium housing and featuring a tempered glass diffuser, this luminaire is designed to accommodate poles ranging from 3 to 6 meters in height, with diameters between 45 and 60mm, and a generous 3 meter flex for effortless installation. Additionally, backed by a dependable 5-year warranty, you can immerse yourself in the brilliance of your illuminated area with complete peace of mind.

Elevate your commercial outdoor experience, redefine your property, and embrace the Milano Post Top—where safety converges with elegance, and your outdoor space comes to life as a focal point of attraction.


Features

- Tri-colour and multi-watt selectable
- Die-cast aluminium housing with advanced thermal transmission
- High-Quality LED Light source
- Tempered Glass Cover
- Up to 150Lm/W efficacy@4000K
- 50,000-hour rated life with a reliable 5-year warranty
- IP65 protection grade, waterproof and dustproof
- Flicker free
- 3m Flex for easy to installation



Applications

- Urban areas, parks, streets, residential centres
- Pathway/walkway, playgrounds, schools

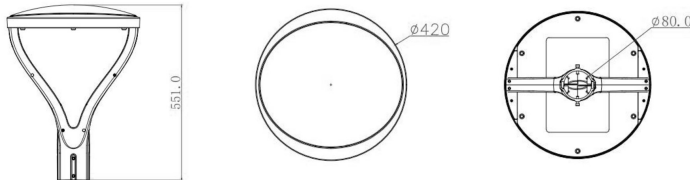

Product Data

Order Code	Wattage	CCT	Lumen Output	Beam Angle	Size(DxH)mm	Weight
461001	80/ 50/ 30W	3000K/4000K /5000K	Up to 12000Lm	120°	420ø x 551mm	3.02

[1] Voltage: 220~240V

[2] Operating Frequency: 50/60Hz

[3] Operating Temperature: -25°C to +45°C