

Features



- Die-cast aluminium heatsink
- High lumen efficacy @115Lm/W with PC diffuser
- 5m flex & plug
- 5m Stainless Steel cable for suspension installation
- DALI2.0 Dimmable optional

Applications

Commercial, Industrial, Facilities,
Warehouses, Centres

Warranty

5 years

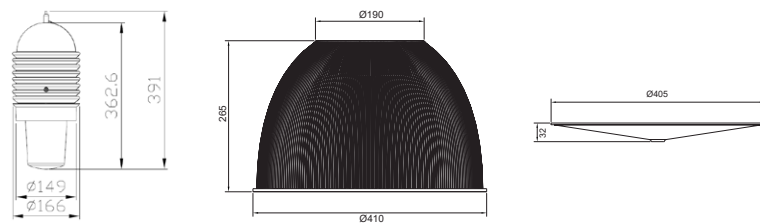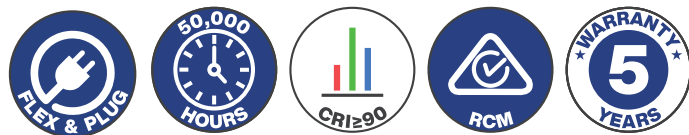

Product Data

Order Code	Wattage	CCT	LUMENS	IP Rating	IK Rating	Beam Angle	Weight (kg)
333563	50W	3000K	5750Lm	IP65	IK08	90°*	3.25
333564	50W	4000K	5750Lm	IP65	IK08	90°*	3.25

- [1] Operating temperature: -30°C~+50°C
 [2] Voltage: 220-240V
 [3] PF: 0.9
 [4] *Beam Angle measured with PC Diffuser only

Necessary Accessories

Item	Order Code
70° PC Diffuser	333709

Optional Accessories

Item	Order Code
70° PC Diffuser Cover	332038

