

## Features



- Five-Colour
- Multi-Watt
- Opal polycarbonate diffuser
- Large 6mm terminal block
- Fully approved to AS2293 standards

## Applications

Offices, Garages, Stations, Industrial,  
Car Parks

## Warranty

3 years

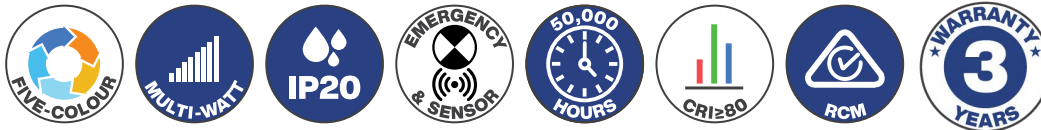

## Product Data

Order Code	Wattage	CCT	Lumen Output	Beam Angle	Size (LxWxH)mm	Weight (kg)
211024HDEMS	40/36/30/26/24/20/14/10W	3K / 4K / 5K / 5.7K / 6.5K	1250 - 5000Lm*	120°	1200x80x65	2.20

[1] Operating temperature: -20°C~+50°C

[2] Voltage: 220-240V

[3] PF: 0.9

[4] \*@3K = 110Lm/W

[5] \*@≥4K = 125Lm/W

Luminaire Classifications	Maximum Spacings (M)															
	Mounting Height (M)															
	2.1	2.4	2.7	3	3.3	3.6	4	4.5	5	6	7	8	9	10	15	
C0-C180	D63	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9	23.7
C90-C270	D32	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1	19.4

Order Code (Battery)	Battery Capacity	Battery Voltage	Charging Time	Discharging Time	Battery Type
211024DEMS	1500 mAh at 0.2 CmA	6.4V	7H	1.5H	LiFePO4

## Accessories

Item	Order Code
Remote Control	213979

Specifications are for reference only and may be changed without prior notice.