


SUMMARY

The SupValite Petite is a compact IP65 floodlight that has been engineered to deliver high lumen efficacy @ 100Lm/W. Suitable for commercial and residential applications, it features an adjustable angle of support up to 160° and a 1.2m flex and plug for quick and easy installation. Constructed from strong die-cast aluminium, it incorporates a tempered etched glass diffuser.

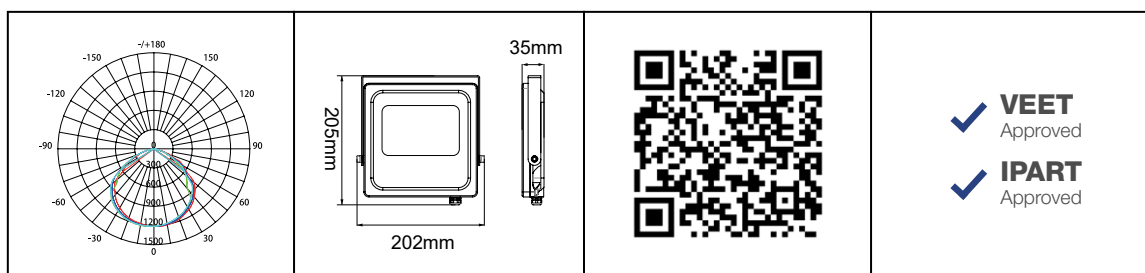

PRODUCT DATA

Order Code	272503A
Voltage	220-240V
Wattage	30W
Lumen Output	3000Lm
CCT	5000K
IP Rating	IP65
IK Rating	IK07
CRI Rating	Ra≥80
Beam Angle	100°
Light Source	SMD Chips
Driver	Integrated
Dimmable	No
Connection	1.2m flex & plug
Construction	Aluminium body / tempered etched glass diffuser
Fitting Colour	Black
PF	0.9
Net Weight (kg)	1.13
Lifetime L70B50	35,000 hours
Warranty	5 years

