



Flicker-Free **WALL WASHER**

Introducing the Wall Washer lighting solution for Education and Training Facilities. The extruded profile is supplied either in 1195mm or 1550mm lengths as standard or can be customised made to order* for your specific project. Wall Washer has been designed with a reflector system to provide a uniform asymmetric lighting distribution

on vertical surfaces and can be installed into standard T-Bar ceiling grids or mounted into Plaster Ceilings. The Aluminium trim is a white powder coat finish. DALI 2.0 can be added for additional lighting control or Wall Washer can be supplied with 0-10v dimming.

Features

- Asymmetric distribution with high efficacy, achieving up to 87Lm/W
- Extended lifespan exceeding 50,000 hours, ensuring longevity and reliability
- Recessed Installation for either T-Bar or Plaster mounting
- 1M Flex and Plug for ease of installation
- DALI and 0-10V dimming options available
- White powder coat finish
- Extruded aluminium trim
- Luminaire can be custom made to length or width on request. MOQ applies*





Applications

- Education, offices, commercial applications, conference rooms, training facilities



In situ profile image

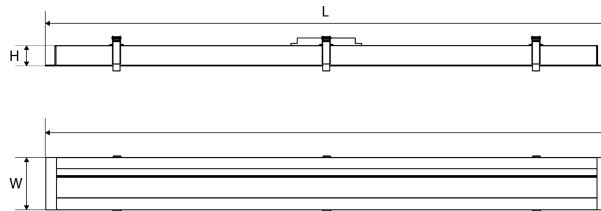

Products Data

Order Code	Wattage	CCT	Lumen Output	PF	Size(LxWxH)mm	Lifetime(Hours)
193204	30W	4000K	2660Lm	0.9	1195x144x55.8mm	50000
193214	40W	4000K	3550Lm	0.9	1550x144x55.8mm	50000

[1] Voltage: 220~240V

[2] Operating Frequency: 50/60Hz

[3] Operating Temperature: -25°C to +45°C