

UltraSlim IP20 Batten

UltraSlim Batten is designed with a sleek, slim profile that seamlessly blends into any environment.

With tri-colour temperature and dual-wattage selections, it delivers different brightness and colour temperature options to suit a variety of needs.

Additionally, our UltraSlim Batten has rear-centred cable entry and 6mm large terminal block, easy to install and maintain.

It is ideal for indoor use in a variety of settings, from offices and retail spaces to homes and hospitality venues.

Features


- Tri-Colour
- Dual-Watt
- Opal polycarbonate diffuser
- Rear centered & end cable entry

Applications

Offices, Garages, Residential Places

Warranty

5 years

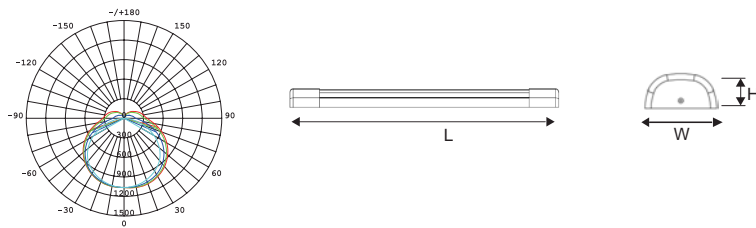

Product Data

Order Code	Wattage	CCT	Lumen Output	Beam Angle	Size (LxWxH)mm	Weight (kg)
211049	10 / 20W	3K / 4K / 5.7K	1000 / 2000Lm	110°	600x85x41	0.39
211050	20 / 40W	3K / 4K / 5.7K	2000 / 4000Lm	110°	1200x85x41	0.71

[1] Operating temperature: -20°C~+45°C

[2] Voltage: 220-240V

[3] PF: 0.9

Order Code.	Inrush current	Duration T _{width}	Number on single-pole power circuit breakers (CB)			Earth leakage current
			CB-type	10A	16A	
211049	4.5A	52μS	B	46 pcs	73 pcs	<0.7mA
			C	76 pcs	125 pcs	
211050	19A	160μS	B	11 pcs	17 pcs	<0.7mA
			C	18 pcs	30 pcs	

Specifications are for reference only and may be changed without prior notice.