


Features

- Versatile colour and brightness control with Tri-colour and multi-watt selectable technology
- Experience exceptional illumination with high efficacy, achieving up to 135Lm/W
- Durable die-cast aluminium body
- Impressive IP65 rating for unmatched water and dust resistance
- IK08 offers robust protection against impact
- 1-10V Dimmable
- 6KV Surge Protection



For Wall Washing

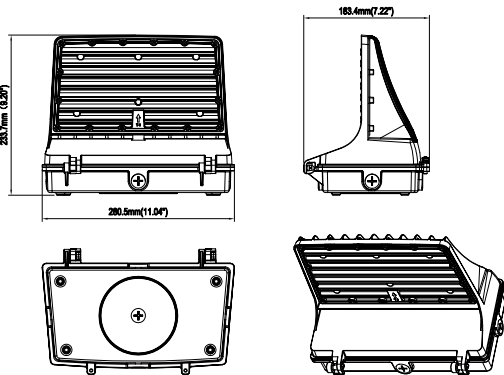

Product Data

Order Code	Wattage	CCT	Lumen Output	Size(LxDxH)mm	Lifetime(Hours)
191003	120/90/60/30W	3K/4K/5K	16200Lm	281 x 234 x 183	50000

[1] Voltage: 120~277V

[2] Operating Frequency: 50/60Hz

[3] Operating Temperature: -25°C to +45°C